



More Precision

scanCONTROL // 2D/3D Laser profile sensors



Laser scanner for industrial series applications

scanCONTROL 25x0

-  Ideal for industrial series applications in production line & automation
-  Resolution x-axis: 640 points
-  High signal stability
-  Also available with patented Blue Laser Technology
-  Numerous references worldwide
-  Compatible with **COGNEX® VisionPro**



SMART
PROFILE

Ideal for series applications

scanCONTROL 25x0 laser scanners are designed for industrial measurement tasks. Thanks to their high signal stability, versatility and excellent price-performance ratio, the scanners are particularly suitable for measurement tasks involving large quantities. They measure and evaluate, e.g., angles, steps, gaps, distances and extreme values. Due to their compact design and low weight, these scanners are also suitable for applications with high accelerations, such as on robots.

Available as PROFILE and SMART versions

The scanCONTROL 25x0 series is available as PROFILE and SMART versions. As PROFILE scanners, they provide calibrated profile data that can be further processed on a PC using software provided by the customer. The SMART scanners work independently and provide selected measurement values. All sensor parameters and the desired measurement programs are set in the scanCONTROL Configuration Tools software and saved directly in the internal controller.


Ideal for production and machine monitoring

The scanCONTROL 25x0 series scanners are available in three different measuring ranges with a red or blue laser. Optional accessories, cable types and interface modules allow a wide range of applications in the production line and in machine building.


Article designation

LLT	25	00	-25	/PT
Options - see below				
Measuring range 25 mm 50 mm 100 mm				
Class 00=PROFILE 10=SMART				
Series LLT25x0				

Laser options*

	/SI	Hardware switch-off of the laser line
	/3B	Increased laser power (class 3B, ≤ 20 mW), e.g., for dark surfaces
	/BL	Blue laser line (405 nm) for (semi-) transparent, red-hot glowing and organic materials

Cable outlet options*

	/PT	Cable directly out of the sensor ("Pigtail") Length 0.3 m
---	-----	--

*Options can be combined

Accessories from page 39

Model		LLT25xx-25	LLT25xx-50	LLT25xx-100
Measuring range (z-axis)	Start of measuring range	53.5 mm	70 mm	190 mm
	Mid of measuring range	66 mm	95 mm	240 mm
	End of measuring range	78.5 mm	120 mm	290 mm
	Height of measuring range	25 mm	50 mm	100 mm
Extended measuring range (z-axis)	Start of measuring range	53 mm	65 mm	125 mm
	End of measuring range	79 mm	125 mm	390 mm
Line linearity (z-axis) ^{[1] [2]}		2 μ m	4 μ m	12 μ m
		\pm 0.008 %	\pm 0.008 %	\pm 0.012 %
Measuring range (x-axis)	Start of measuring range	23.4 mm	42 mm	83.1 mm
	Mid of measuring range	25 mm	50 mm	100 mm
	End of measuring range	29.1 mm	58 mm	120.8 mm
Extended measuring range (x-axis)	Start of measuring range	23.2 mm	40 mm	58.5 mm
	End of measuring range	29.3 mm	60 mm	143.5 mm
Resolution (x-axis)		640 points/profile		
Profile frequency		up to 2,000 Hz		
Interfaces	Ethernet GigE Vision	Output of measurement values Sensor control Profile data transmission		
	Digital inputs	Mode switching Encoder (counter) Trigger		
	RS422 (half-duplex) ^[3]	Output of measurement values Sensor control Trigger Synchronization		
Output of measurement values ^{[4] [5]}		Ethernet (UDP / Modbus TCP); RS422 (ASCII / Modbus RTU) Analog; switch signal PROFINET; EtherCAT; EtherNet/IP		
Control and indicator elements		3x color LEDs for laser, data and error		
Light source	Red Laser	\leq 8 mW		
		Standard: laser class 2M, semiconductor laser 658 nm		
		\leq 20 mW		
	Blue laser	Option: laser class 3B, semiconductor laser 658 nm		
		\leq 8 mW		
		Standard: laser class 2M, semiconductor laser 405 nm		
Laser switch-off		via software, hardware switch-off with /SI option		
Aperture angle of laser line		20 °	25 °	25 °
Permissible ambient light (fluorescent light) ^[1]		10,000 lx		
Protection class (DIN EN 60529)		IP65 (when connected)		
Vibration (DIN EN 60068-2-27)		2g / 20 ... 500 Hz		
Shock (DIN EN 60068-2-6)		15g / 6 ms		
Temperature range	Storage	-20 ... +70 °C		
	Operation	0 ... +45 °C		
Weight		380 g (without cable)		
Supply voltage		11 ... 30 VDC, nominal value 24 V, 500 mA, IEEE 802.3af class 2, Power over Ethernet (PoE)		

^[1] Based on the measuring range; measuring object: Micro-Epsilon standard object

^[2] According to a one-time averaging across the measuring field (640 points)



^[3] RS422 interface, programmable either as serial interface or as input for triggering/synchronization

^[4] Analog | switching signal: Only in conjunction with 2D/3D output unit

^[5] PROFINET | EtherCAT | EtherNet/IP: Only in conjunction with 2D/3D gateway

LLT25x0-25 / LLT29x0-25

Red Laser Blue Laser

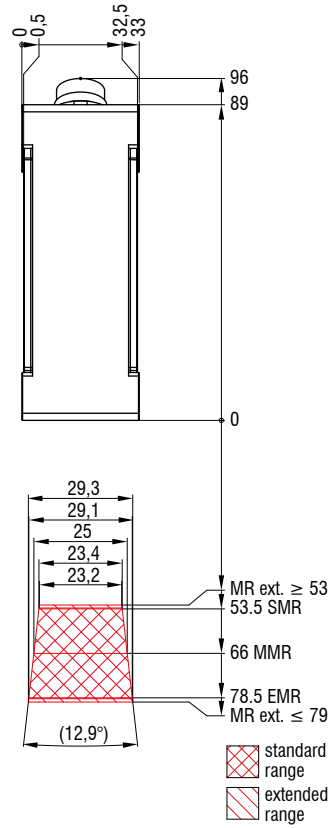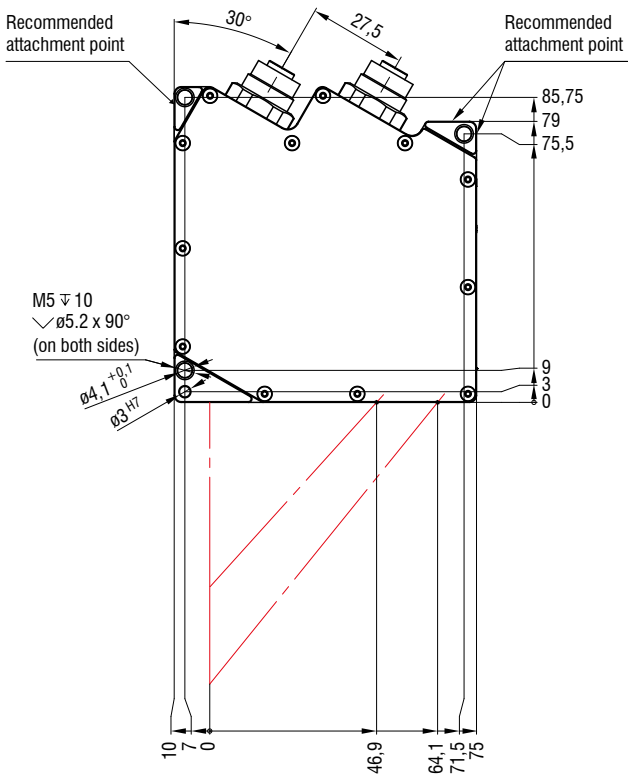

(dimensions in mm, not to scale)


Dimensions and measuring ranges

scanCONTROL

LLT25x0-50 / LLT29x0-50

Red Laser


Blue Laser

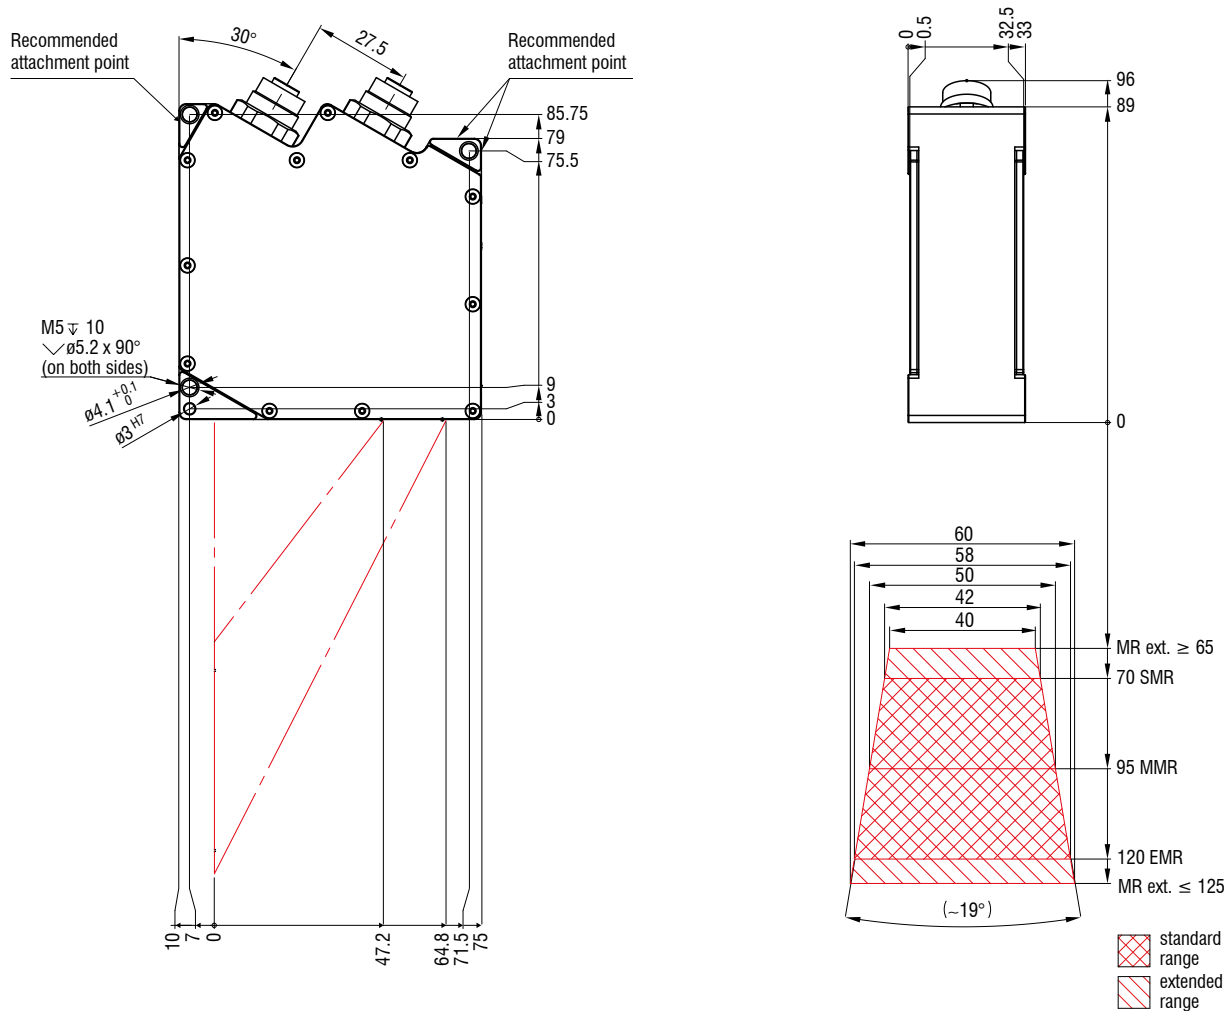

(dimensions in mm, not to scale)

LLT25x0-100 / LLT29x0-100

Red Laser Blue Laser

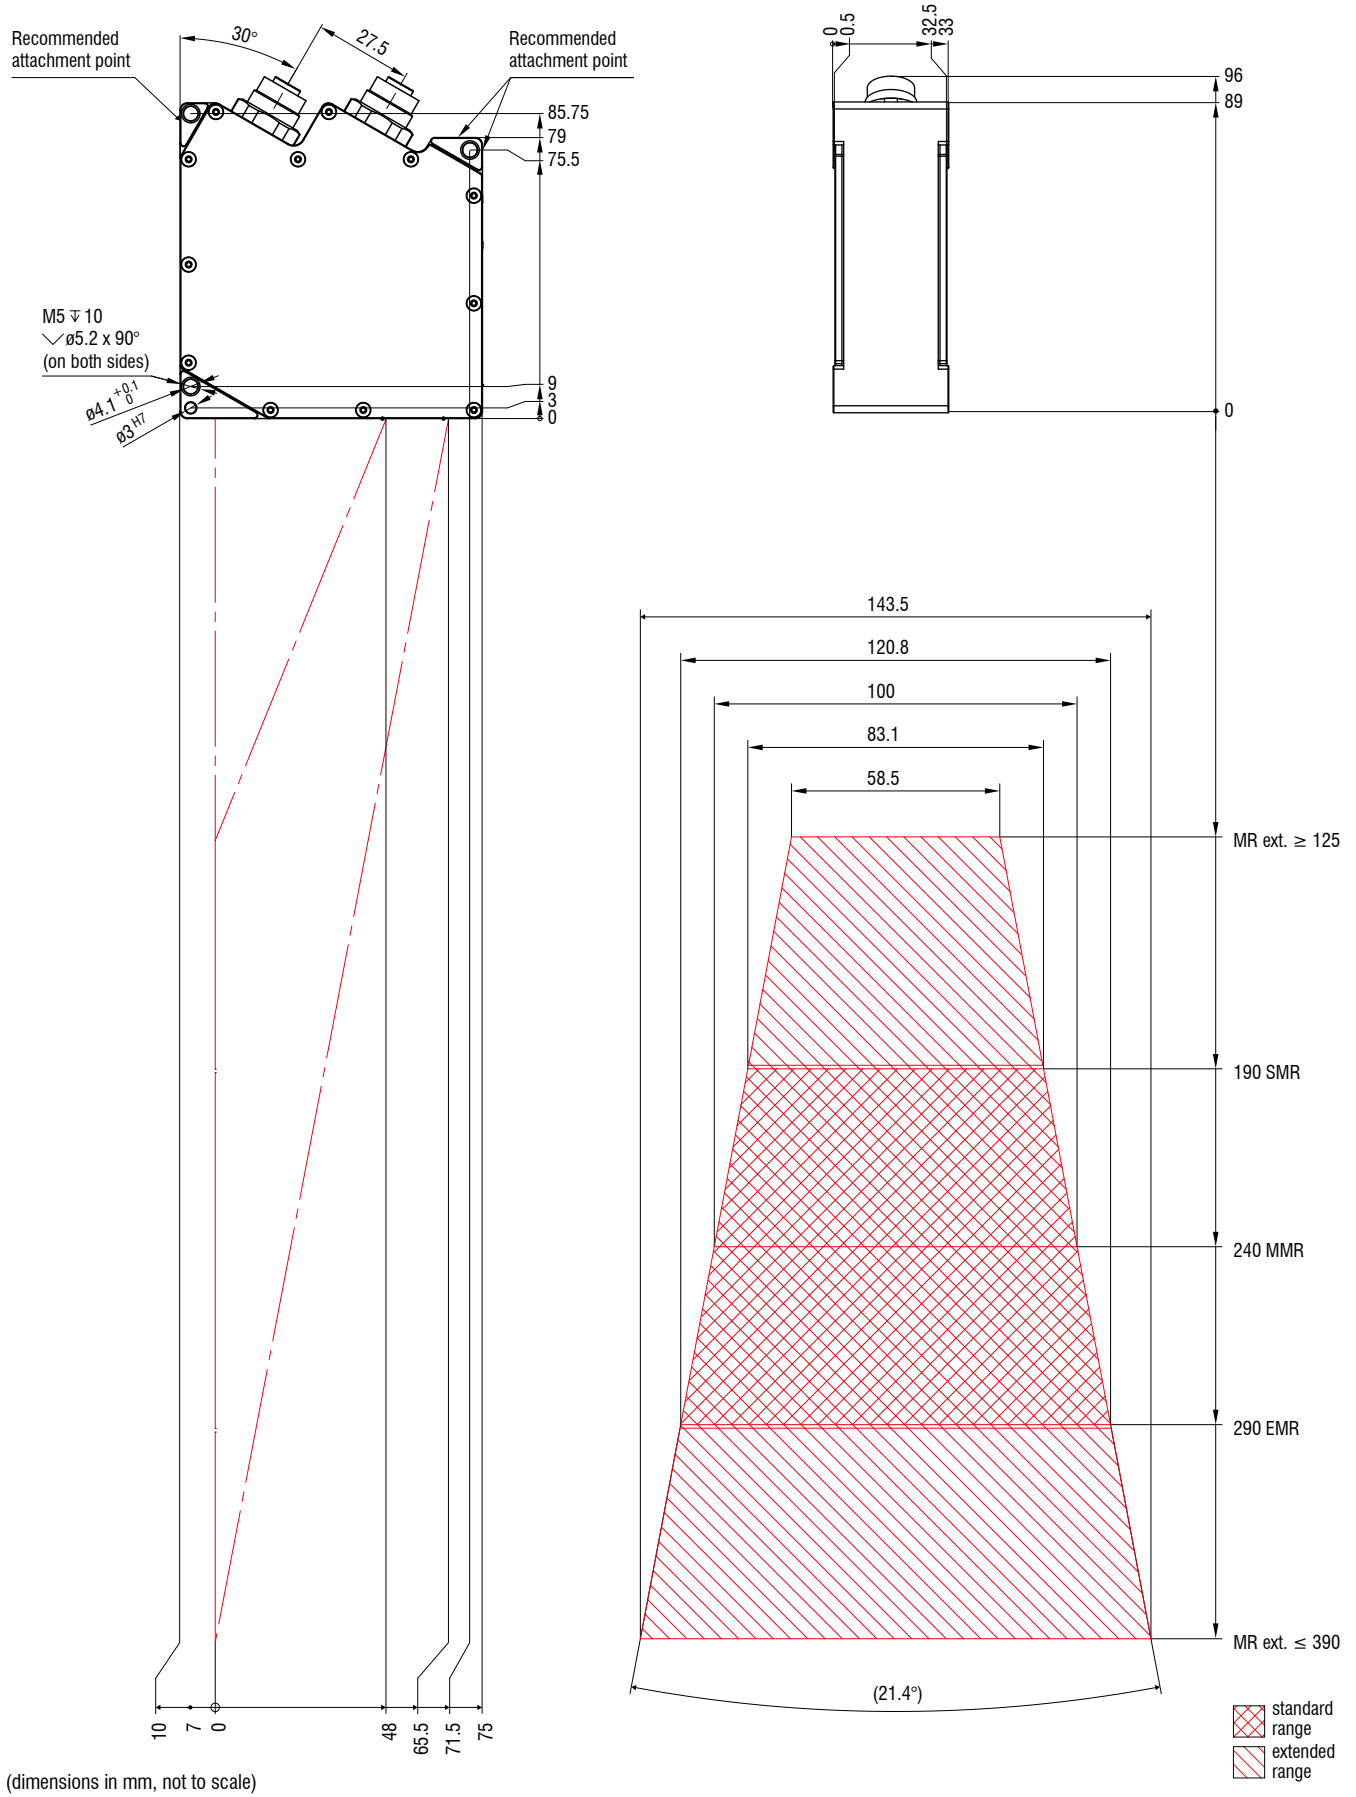


Sensors and Systems from Micro-Epsilon



Sensors and systems for displacement, distance and position



Sensors and measurement devices for non-contact temperature measurement

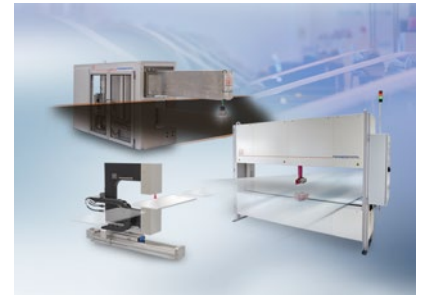


Measuring and inspection systems for metal strips, plastics and rubber



Optical micrometers and fiber optics, measuring and test amplifiers



Color recognition sensors, LED analyzers and inline color spectrometers

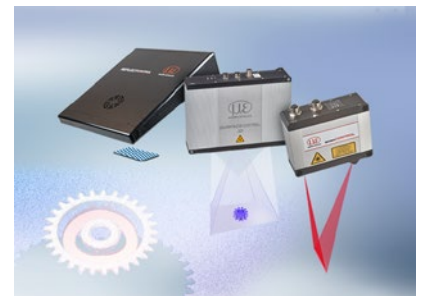

3D measurement technology for dimensional testing and surface inspection

